

First Responder Control Console

The CC-2006 First Responder Control Console is designed to control and interface with a Motorola Quantar™ Repeater. The CC-2006 is microcomputer based; it is a stand-alone device and does not require connection to a computer or any external device for normal operation.

The console is on and in Stand-by mode at all times. A manual FDNY 1620 key is used to put the unit into Active mode.

The console can interface to one of two repeaters. Repeater selection is via a toggle switch. There are two pairs of LED's next to the switch to indicate the status of the two repeaters and which repeater is selected.

There are two Push-To-Talk (PTT) controls; one on the handset and one on the front panel. An off-hook switch senses if the handset is removed from the cradle.

The console has a built-in record function, providing a minimum of one hour record time. The outgoing message is recorded when either of the PTT buttons is pressed; if neither is pressed the incoming message is automatically recorded. Simple, intuitive controls are provided for playback. The console has two separate speakers; one for the incoming message and one for playback of the recorded message.

There are three types of Input/Output signals between the console and the Fiber Optic Transceiver. Bi-directional audio signals are the outgoing and incoming voice messages. Bidirectional RS-232 lines provide serial control inputs and status outputs from the repeater. A switch contact is derived from the PTT function and is used to key the transmitter.

General Specifications


Dimensions: Weight: 5 LB
Power: 117 VAC, 35 W
Max. Operating Temp: 0° to 70° C

Recorder Specifications

Minimum Record Time: 1 Hour
Functions: Playback, Stop,
Forward, Reverse

RS-232 Specifications

Bi-Directional, RS-232 Levels
Baud Rate: default 9600 Baud

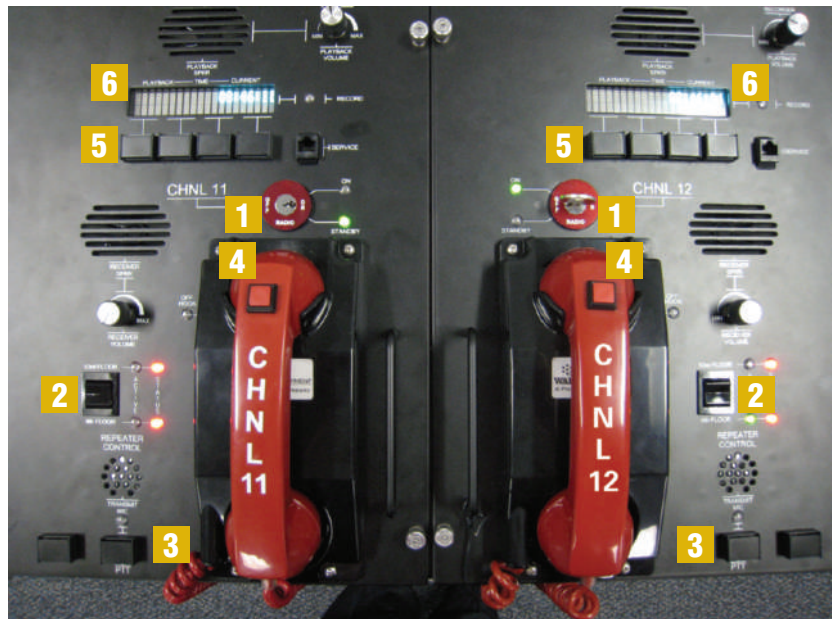

CONTROLS AND INDICATORS

1 Mode Select

Mode select is via a manual FDNY 1620 key. The console is normally on and in Stand-by mode. The 1620 key is used to put the unit into Active mode.

2 Repeater Select Switch

The Repeater Select switch determines which repeater is active. The UP position selects the 53rd floor repeater and the DOWN position selects the 4th floor repeater.

3 Front-Panel PTT Switch

The PTT switch is used to control the direction of the voice message.

4 Handset PTT Switch

The handset PTT switch controls the direction of the voice message; identical function to Front-Panel PTT switch

5 Mode Control Buttons

There are five mode control buttons located under the display (the display is described below). The primary function of four of these buttons is control of the recorder playback function. Some of these buttons have an alternate function. The fifth button is a MENU select, and is used to temporarily enable the alternate functions. The alternate functions are automatically disabled after 30 seconds, and the buttons revert back to the primary (recorder playback) functions.

6 Display

The unit has a 2-row X 24-column Vacuum Fluorescent Display. This display provides high brightness and wide viewing angle under varying lighting and environmental conditions. Time and Record/Playback status are displayed at all times.



AIRORLITE COMMUNICATIONS, INC.

A Division of Henry Bros. Electronics, Inc.

17-01 Pollitt Drive
Fair Lawn, NJ 07410
201-398-0960
Fax: 398-0962
info@airorlite.com